


Leak Detector

Ref.^a TH3-Leak v1

Applications

- Water detection under raised floors
- Leaky pipe detection (cable wrapped along the pipe)
- Protection against floods from roof lights – sensing cable routed along the walls
- Detection of water leaks in drip trays
- Detection of water leaks under air-conditioning outlets

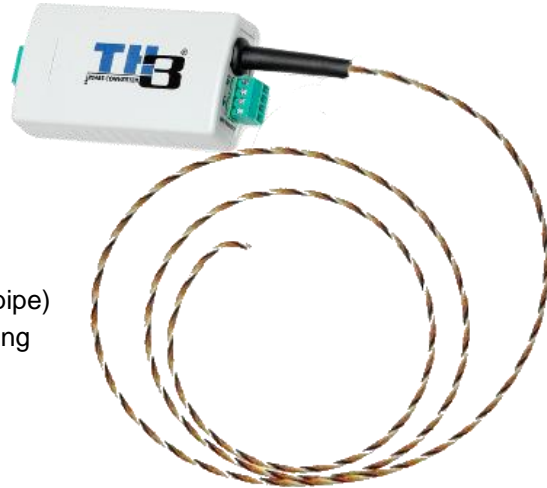

Characteristics:

- Operating temperature: -10 to 65 ° C
- Use in soil and liquids
- Can be fully submerged
- Measuring range: 0-1500 (sensitivity)
- Does not require calibration
- Length up to 300 meters
- RS485 Modbus / ASCII